



MODEL- DSC 800 HEATING

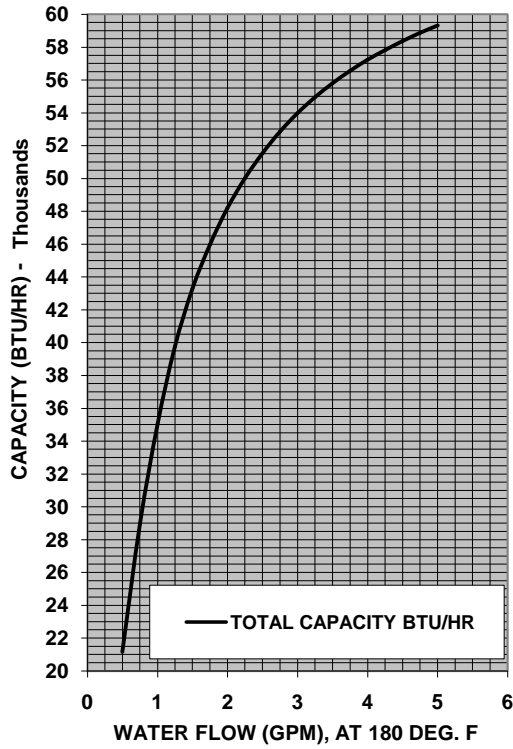

MODEL- DSC 800 HEATING

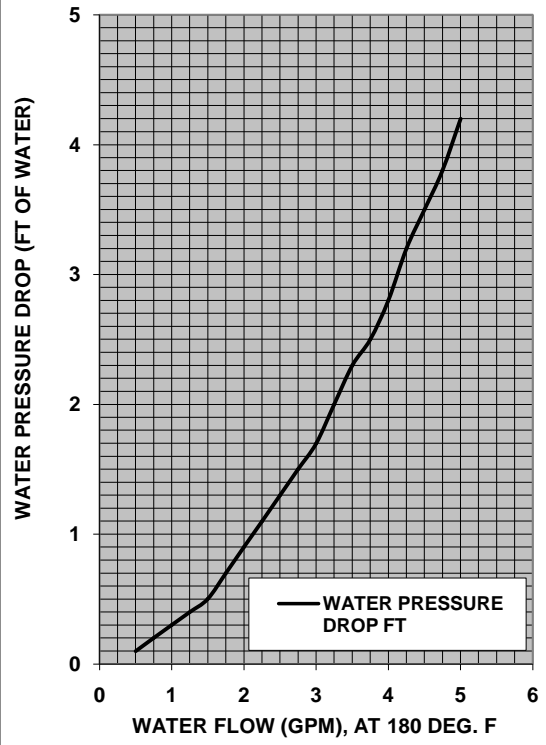

ENTERING AIR TEMPERATURE

70 DEG. F (Db)

| WATER FLOW | TOTAL CAPACITY | WATER PRESSURE DROP |
|------------|----------------|---------------------|
| GPM | BTU/HR | FT |
| 0.5 | 21,158.00 | 0.10 |
| 0.75 | 28,963.00 | 0.20 |
| 1 | 35,033.00 | 0.30 |
| 1.25 | 39,752.00 | 0.40 |
| 1.5 | 43,285.00 | 0.50 |
| 1.75 | 45,991.00 | 0.70 |
| 2 | 48,194.00 | 0.90 |
| 2.25 | 50,017.00 | 1.10 |
| 2.5 | 51,547.00 | 1.30 |
| 2.75 | 52,850.00 | 1.50 |
| 3 | 53,971.00 | 1.70 |
| 3.25 | 54,946.00 | 2.00 |
| 3.5 | 55,800.00 | 2.30 |
| 3.75 | 56,556.00 | 2.50 |
| 4 | 57,229.00 | 2.80 |
| 4.25 | 57,831.00 | 3.20 |
| 4.5 | 58,374.00 | 3.50 |
| 4.75 | 58,866.00 | 3.80 |
| 5 | 59,314.00 | 4.20 |

Technical data contained herein is based on laboratory findings and made available as a guide for Design Engineers. Information is given gratis and seller assumes no obligation or liability for results obtained.