



**MODEL- (D)LE 350 COOLING**

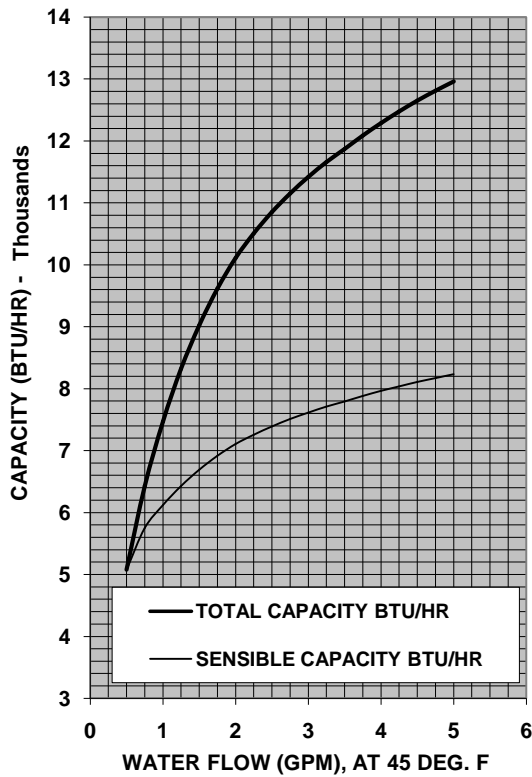

**MODEL- (D)LE 350 COOLING**

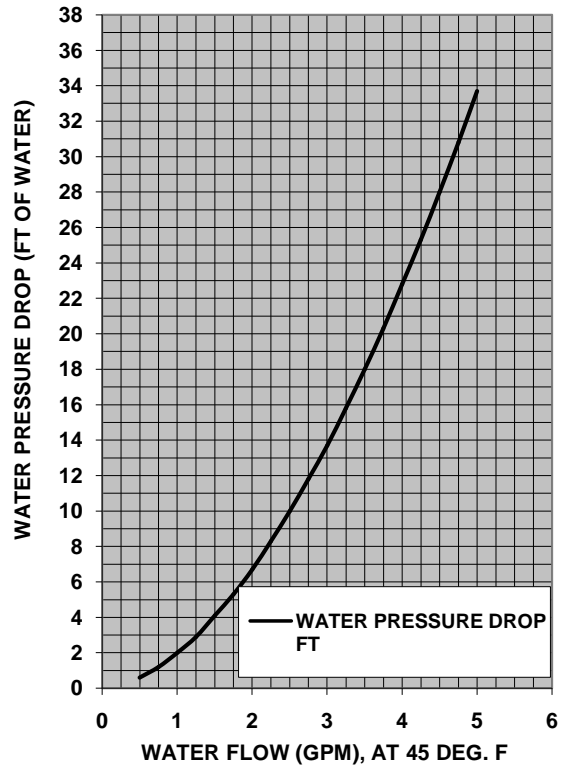

**ENTERING AIR TEMPERATURES**

**78 DEG. F (Db)**

**67 DEG. F (Wb)**

WATER FLOW		TOTAL CAPACITY	SENSIBLE CAPACITY	WATER PRESSURE DROP
GPM		BTU/HR	BTU/HR	FT
0.5		5,079.00	5,079.00	0.60
0.75		6,427.00	5,750.00	1.20
<b>1</b>		7,471.00	6,119.00	2
1.25		8,318.00	6,430.00	2.9
1.5		9,021.00	6,692.00	4.1
1.75		9,615.00	6,916.00	5.3
<b>2</b>		10,113.00	7,107.00	6.7
2.25		10,508.00	7,259.00	8.30
2.5		10,851.00	7,393.00	10
2.75		11,153.00	7,511.00	11.8
<b>3</b>		11,420.00	7,616.00	13.7
3.25		11,657.00	7,711.00	15.8
3.5		11,870.00	7,795.00	18
3.75		12,089.00	7,883.00	20.3
<b>4</b>		12,290.00	7,963.00	22.8
4.25		12,476.00	8,038.00	25.30
4.5		12,650.00	8,108.00	28.00
4.75		12,811.00	8,174.00	30.8
<b>5</b>		12,961.00	8,235.00	33.70

Technical data contained herein is based on laboratory findings and made available as a guide for Design Engineers. Information is given gratis and seller assumes no obligation or liability for results obtained.