



**MODEL- (D)LE 600 COOLING**

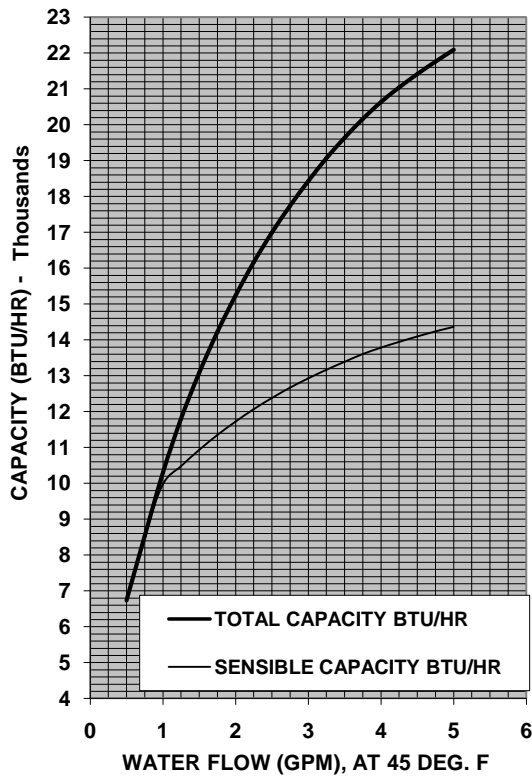

**MODEL- (D)LE 600 COOLING**

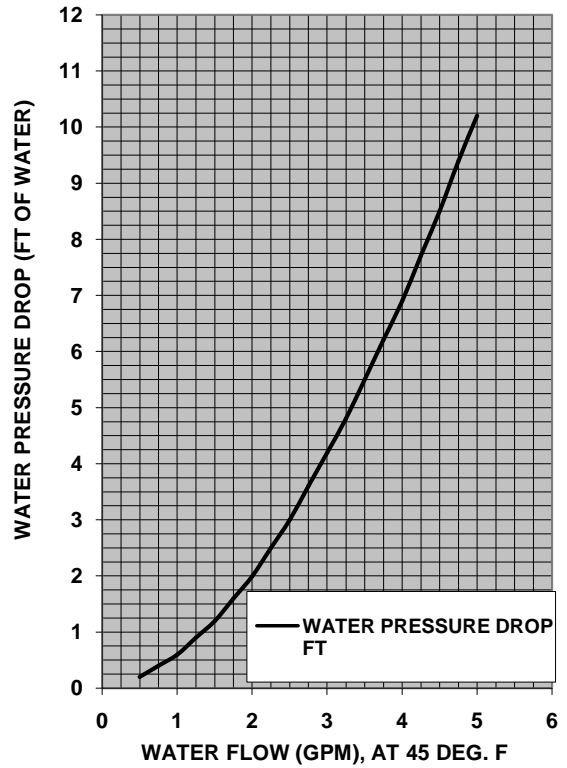

**ENTERING AIR TEMPERATURES**

**78 DEG. F (Db)**

**67 DEG. F (Wb)**

WATER FLOW		TOTAL CAPACITY	SENSIBLE CAPACITY	WATER PRESSURE DROP
GPM	BTU/HR	BTU/HR	BTU/HR	FT
0.5	6,733.00	6,733.00	6,733.00	0.20
0.75	8,539.00	8,539.00	8,539.00	0.40
1	10,304.00	9,970.00	9,970.00	0.60
1.25	11,792.00	10,477.00	10,477.00	0.90
1.5	13,083.00	10,931.00	10,931.00	1.20
1.75	14,224.00	11,346.00	11,346.00	1.60
2	15,243.00	11,722.00	11,722.00	2.00
2.25	16,160.00	12,064.00	12,064.00	2.50
2.5	16,990.00	12,376.00	12,376.00	3.00
2.75	17,745.00	12,663.00	12,663.00	3.60
3	18,432.00	12,927.00	12,927.00	4.20
3.25	19,060.00	13,169.00	13,169.00	4.80
3.5	19,636.00	13,393.00	13,393.00	5.50
3.75	20,165.00	13,600.00	13,600.00	6.20
4	20,634.00	13,785.00	13,785.00	6.90
4.25	21,040.00	13,946.00	13,946.00	7.70
4.5	21,415.00	14,095.00	14,095.00	8.50
4.75	21,763.00	14,233.00	14,233.00	9.40
5	22,086.00	14,363.00	14,363.00	10.20

Technical data contained herein is based on laboratory findings and made available as a guide for Design Engineers. Information is given gratis and seller assumes no obligation or liability for results obtained.